



8 Port Analog Failover VoIP Gateway


Quick Facts

- » Multi-Carrier 4G Wireless
- » Up to 250 SIP Devices
- » Fully Automated Failover
- » 6 FXS / 2 FXO Ports
- » Optional Battery Backup



Experience Uninterrupted Calling—Even During Internet or Power Outages

The ClearlyIP VoIP Failover Gateway plugs easily into your LAN and offers both a secondary registration point for your IP Handsets and dial tone from ClearlyIP to your site's analog equipment using its 6 built-in FXS ports. Whenever there's an Internet or PBX service disruption—even during power outages—the gateway's innovative design allows a built-in 4G multi-carrier wireless link to take over, routing voice calls until your primary connection is restored—essential for ensuring 911 call completion.

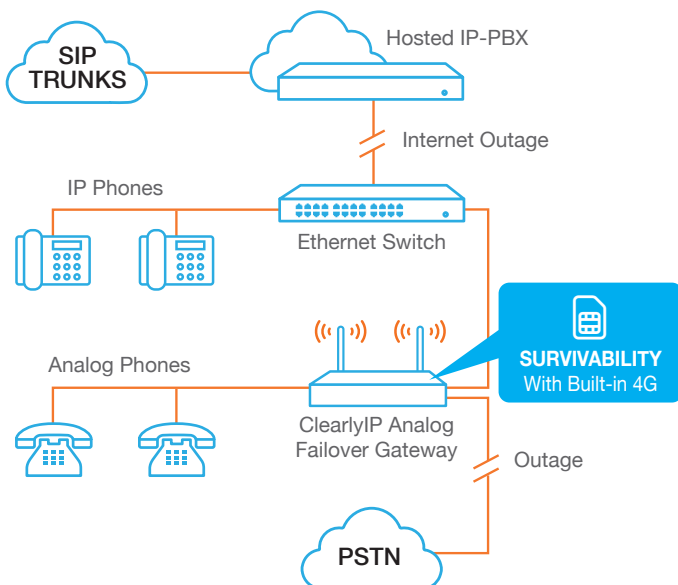

KEY FEATURES:

- » 4G Built-In : Turn-key multi-carrier solution for surviving Internet and power outages.
- » Fails automatically to SIP trunking during any cloud PBX outage.
- » Station-to-station calling stays inside your LAN whenever the gateway is handling traffic, saving bandwidth for external calls.
- » 6 FXS ports allow direct connections to legacy voice devices.
- » Strong security : TLS/SRTP encryption, whitelist/blacklist, brute force login prevention, etc.
- » Easy Deployment : Managed locally via web GUI or cloud by ClearlyIP.



APPLICATIONS



Survivability

- » Delivers a cost-effective business continuity solution for voice with turn-key simplicity.
- » Handles critical emergency calling survivability, including dialtone for elevator phones, door boxes, public area phones and other life-safety equipment.



POTS Replacement

- » Delivers survivability that can exceed legacy POTS line performance.
- » Replaces legacy lines at small businesses.
- » Front-ends analog key system PBX systems.
- » Battery backup option available.

SPECIFICATIONS

PROTOCOLS

- » **Call Control:** SIP/UDP and SIP/TCP
- » **Protocols:** HTTP/HTTPS, SSH, DHCP, DNS, RTP/RTCP, STUN, NTP, TLS
- » **VPN Clients:** OpenVPN

MEDIA PROCESSING

- » **Codec:** G.711u, G.711a, G.729a
- » **DTMF:** RFC2833, SIP-INFO, Inband

MANAGEMENT & PROVISIONING

- » **Local Administration:** HTTPS
- » **Auto-Provisioning:** TFTP, FTP, HTTP, HTTPS, DHCP Optio 66
- » **Cloud Managed:** ClearlyIP Managed Option

CERTIFICATIONS

- » **Wireless Carriers:** Verizon, AT&T, T-Mobile, U.S. Cellular, Rogers, Telus, CellCom
- » **Regulatory:** GCF, FCC, IC, RoHS, WHQL

HARDWARE

- » **Voice Ports:** 6 FXS, 2 FXO
- » **4G Module:** FDD-LTE
- » **Network Ports:** 2x 10/100/1000M adaptive Ethernet ports (1 LAN, 1 WAN)
- » **Weight (net):** 2.6lbs (1.2kg)
- » **Power:** 12 Vdc / 2A
- » **Power Consumption:** 18w
- » **Optional Battery Standby:** Up to 10 hrs
- » **Mounting:** Desktop / Rackmount
- » **Operating Temperatures:** 0°C - 40°C, Humidity: 10% to 90% RH (non-condensing)
- » **Storage Temperatures:** -40°C - 70°C, Humidity: 5% to 90% RH (non-condensing)

📍 3255 W Highview Drive, Appleton, WI 54914

Every effort has been made to ensure accuracy of this document. Due to ongoing improvements and revisions, ClearlyIP reserves the right to make changes without notice. All trademarks, service marks, trade names, trade dress, product names and logos are the property of their respective owners.

© Copyright 2024 Clearly IP. All rights reserved.

+1 855 802 6465

www.clearlyip.com